


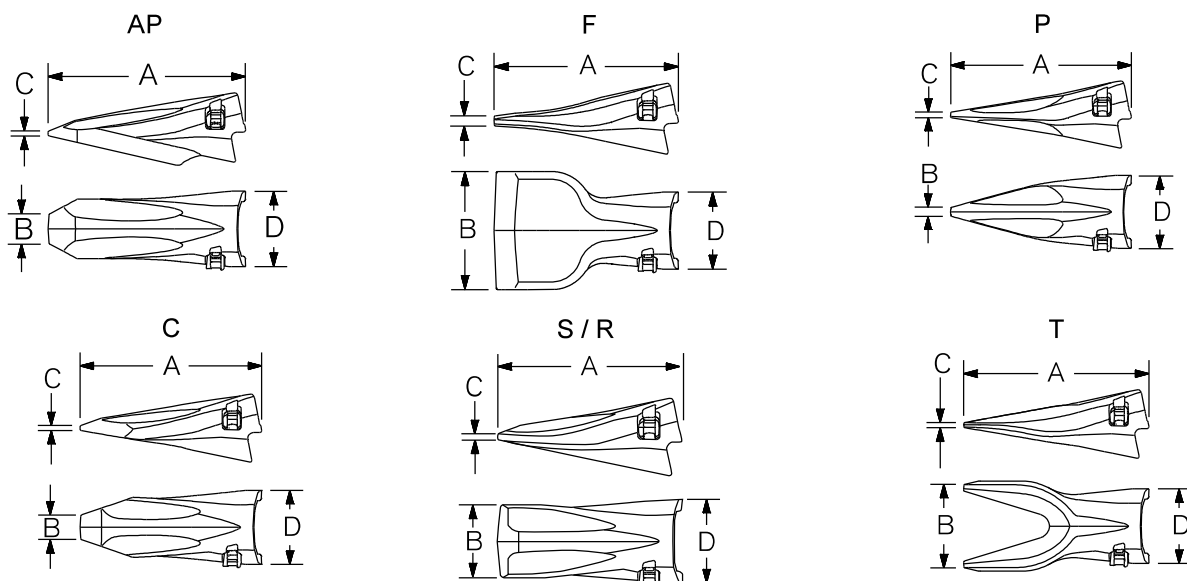

U20 Points

PART ID	DESCRIPTION	A LENGTH mm / in	B BIT WIDTH mm / in	C BIT THICKNESS mm / in	D WIDTH AT EARS mm / in	WEIGHT kg / lb
U20AP	Abrasion Penetration	200 / 7.86	35 / 1.37	5 / 0.22	78 / 3.07	2.7 / 5.9
U20F	Flare	176 / 6.92	114 / 4.50	11 / 0.43	78 / 3.07	2.4 / 5.3
U20P	Pick	202 / 7.94	10 / .40	7 / 0.27	78 / 3.07	1.7 / 3.9
U20C	Chisel	191 / 7.52	27 / 1.06	10 / 0.39	78 / 3.07	2.0 / 4.4
U20CHB	Chisel**	191 / 7.52	27 / 1.06	10 / 0.39	78 / 3.07	2.0 / 4.4
U20S	Standard	176 / 6.93	69 / 2.71	7 / 0.29	78 / 3.07	2.0 / 4.4
U20SHB	Standard**	176 / 6.93	69 / 2.71	7 / 0.29	78 / 3.07	2.0 / 4.4


Lock Assembly

PART ID	DESCRIPTION	LENGTH mm/in	WEIGHT PER PART kg/lb
U20-25L-BOX	ULTRALOK LOCK ASSEMBLY-10EA;NONE	20.08 / 0.79	0.03 / 0.06
U20-25LHB-BOX	ULTRALOK BOLT-IN HS LOCK-10EA;NONE	20.08 / 0.79	0.05 / 0.1

Note: Available by the box, 10 locks per box.

Standard


LHB



Pry Tools / Removal Tools

PART ID	DESCRIPTION	WEIGHT kg/lb
CPB8G	PRY BAR WITH HANDLE-SMALL;	0.14 / 0.30
84005	FINES PICK TOOL-SMALL;	0.05 / 0.10

CPB8G





84005



Weld-on Nose


PART ID	DESCRIPTION	A WIDTH mm/in	B HEIGHT mm/in	C J-GROOVE mm/in	WEIGHT kg/lb
WN-U20	Weldon Nose	75 / 2.95	72 / 2.84	18 / .69	1.6 / 3.5



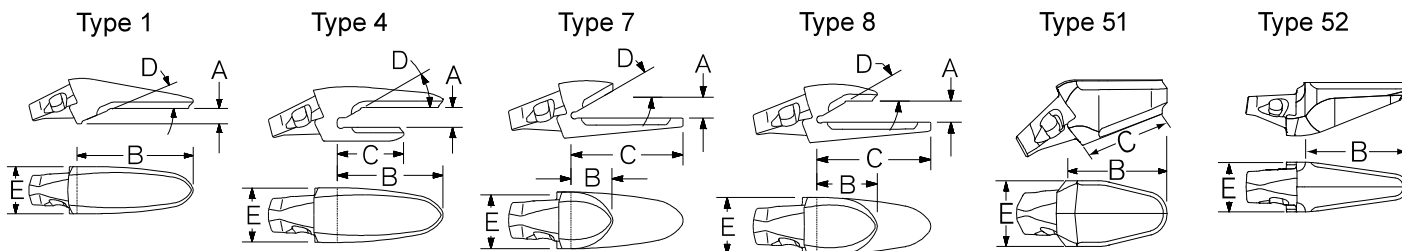

U20 Adapters

PART ID	TYPE	DESCRIPTION	A LIP THICKNESS mm / in	B TOP LEG mm / in	C BOTTOM LEG mm / in	D RAMP ANGLE deg	E ADAPTER WIDTH mm / in	NOSE ANGLE deg	WEIGHT kg / lb	MACHINE TYPE
Excavator										
5854-U20	8	1-1/2 Bottom Leg	25 / 1.00	79 / 3.12	165 / 6.50	30	75 / 2.95	10	3.7 / 8.2	EXC
833-U20	7	Bottom Leg	25 / 1.00	42 / 1.67	130 / 5.12	30	75 / 2.95	10	3.2 / 7.2	EXC
Wheel Loader										
3877-U20	4	1-1/2 Top Leg	30 / 1.20	153 / 6.01	76 / 2.98	30	75 / 2.95	15	3.9 / 8.6	FEL
8802-U20	1	Flushmount	20-25 / .75-1.00	175 / 6.89	N/A	25	75 / 2.95	15	5.1 / 11.2	Volvo L70C/D
Miscellaneous										
3895-U20	51	Flushmount	N/A	105 / 4.15	113 / 4.44	0	75 / 2.97	30 or 10	3.7 / 8.1	Reversible Auger or Clamshell
3898-U20	52	Flushmount	N/A	123 / 4.85	N/A	0	75 / 2.97	9	3.7 / 8.1	Clamshell

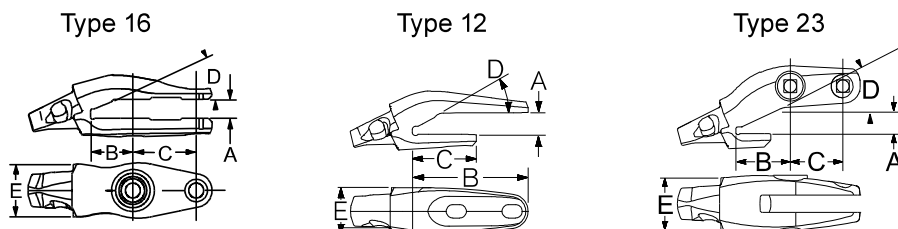

U20 Bolt-on Adapters

PART ID	TYPE	DESCRIPTION	A LIP THICKNESS mm/in	B 1st BOLT HOLE mm/in	C 2nd BOLT HOLE mm/in	D RAMP ANGLE deg	E ADAPTER WIDTH mm/in	NOSE ANGLE deg	WEIGHT kg/lb	BOLTS (qty) SIZE (in)	MACHINE MODEL
5739-U20	16	2 Leg 2 Bolt	22 / 0.88	53 / 2.07	95 / 3.74	25	83 / 3.29	15	6.75 / 14.9	(1) 3/4 X 3 PB ^ (1) 3/4 X 3-1/2 PB ^	KAW 60Z IV, 65Z IV, 65Z V
5795-U20	23	2 Leg Corner 2 Bolt	22 / 0.88	100 / 3.94	100 / 3.94	25	89 / 3.49	15	9.5 / 21.0	(2) 3/4 X 3 PB ^	KAW 60Z IV, 65Z IV, 65Z V
8716-U20	12	1-1/2 Leg 2 Bolt	32 / 1.25	64 / 2.51	89 / 3.50	27.4	85 / 3.24	15	6.5 / 14.3	(1) 3/4 X 3-1/4 PB ^ (1) 3/4 X 3-1/2 PB ^	CASE 721B/C
8707L-U20	23	2 Leg Corner 2 Bolt	32 / 1.25	64 / 2.51	89 / 3.50	27.4	104 / 4.1	15	7.6 / 16.64	(1) 3/4 X 3-1/4 PB ^ (1) 3/4 X 2-3/4 PB ^	CASE 721B/C
8707R-U20	23	2 Leg Corner 2 Bolt	32 / 1.25	64 / 2.51	89 / 3.50	27.4	104 / 4.1	15	7.6 / 16.64	(1) 3/4 X 3-1/4 PB ^ (1) 3/4 X 2-3/4 PB ^	CASE 721B/C

^ Use with 3/4" x 45 degree tapered nut