

U55 Points

PART ID	DESCRIPTION	A	B	C	D	WEIGHT
		LENGTH	BIT	BIT	WIDTH AT	
		mm / in	WIDTH	THICKNESS	EARS	kg / lb
			mm / in	mm / in	mm / in	
U55A	Abrasion	397 / 15.62	98 / 3.86	21 / 0.82	169 / 6.66	35.0 / 77.2
U55AH	Abrasion Hot Slag*	397 / 15.62	98 / 3.86	21 / 0.82	169 / 6.66	35.0 / 77.2
U55AHB	Abrasion Hot Slag**	397 / 15.62	98 / 3.86	21 / 0.82	169 / 6.66	35.0 / 77.2
U55AP	Abrasion Penetration	442 / 17.41	67 / 2.64	11 / 0.42	169 / 6.66	29.7 / 65.5
U55APHB	Abrasion Penetration**	442 / 17.41	67 / 2.64	11 / 0.42	169 / 6.66	29.7 / 65.5
U55C	Chisel	415 / 16.34	57 / 2.24	11 / 0.42	169 / 6.66	20.6 / 45.4
U55CH	Chisel Hot Slag*	415 / 16.34	57 / 2.24	11 / 0.42	169 / 6.66	20.6 / 45.4
U55CHB	Chisel Hot Slag**	415 / 16.34	57 / 2.24	11 / 0.42	169 / 6.66	20.6 / 45.4
U55CP	Chisel Pick	363 / 14.29	77 / 3.04	19 / 0.77	169 / 6.66	17.6 / 38.7
U55CPHB	Chisel Pick**	363 / 14.29	77 / 3.04	19 / 0.77	169 / 6.66	17.6 / 38.7
U55F	Flare	397 / 15.63	254 / 9.99	22 / 0.88	169 / 6.66	26.1 / 57.5
U55FH	Flare Hot Slag*	398 / 15.63	255 / 9.99	23 / 0.88	170 / 6.66	26.1 / 57.6
U55H	Heavy	413 / 16.25	58 / 2.28	22 / 0.87	169 / 6.66	24.5 / 55.0
U55HHB	Heavy**	413 / 16.25	58 / 2.28	22 / 0.87	169 / 6.66	24.5 / 55.0
U55P	Pick	420 / 16.52	22 / 0.86	14 / 0.54	169 / 6.66	16.5 / 36.6
U55PHB	Pick**	420 / 16.52	22 / 0.86	14 / 0.54	169 / 6.66	16.5 / 36.6
U55PX	Short Pick	371 / 14.61	22 / 0.86	14 / 0.54	169 / 6.66	15.2 / 33.4
U55PXHB	Short Pick**	371 / 14.61	22 / 0.86	14 / 0.54	169 / 6.66	15.2 / 33.4
U55S	Standard	372 / 14.65	155 / 6.08	16 / 0.63	169 / 6.66	20.5 / 44.9
U55SHB	Standard**	372 / 14.65	155 / 6.08	16 / 0.63	169 / 6.66	20.5 / 44.9
U55T	Twin Pick	419 / 16.50	204 / 8.05	13 / 0.51	169 / 6.66	20.0 / 44.1
U55THB	Twin Pick**	419 / 16.50	204 / 8.05	13 / 0.51	169 / 6.66	20.0 / 44.1


* Ships with Hot Slag Lock; ** Ships with Bolt-in Lock

Lock Assembly

PART ID	DESCRIPTION	LENGTH mm/in	WEIGHT PER PART kg/lb
U55L-BOX	ULTRALOK LOCK ASSEMBLY-10EA;NONE	39.67 / 1.56	0.20 / 0.44
U55LH-BOX	ULTRALOK HOT SLAG LOCK-10EA;NONE	39.88 / 1.57	0.42 / 0.92
U55LHB-BOX	ULTRALOK BOLT-IN HS LOCK-10EA;NONE	39.88 / 1.57	0.34 / 0.75

Note: Available by the box, 10 locks per box.


Standard



LHB




Hot Slag



Pry Tools / Removal Tools

PART ID	DESCRIPTION	WEIGHT kg/lb
CPB31G	PRY BAR WITH HANDLE-LARGE;	1.15 / 2.53
84001	FINES PICK TOOL-LARGE;	0.15 / 0.30

CPB31G





84001



Weld-on Nose

PART ID	DESCRIPTION	A WIDTH mm/in	B HEIGHT mm/in	C J-GROOVE mm/in	WEIGHT kg/lb
WN-U55	Weld-on Nose	163 / 6.42	156 / 6.15	38 / 1.50	16.1 / 35.5



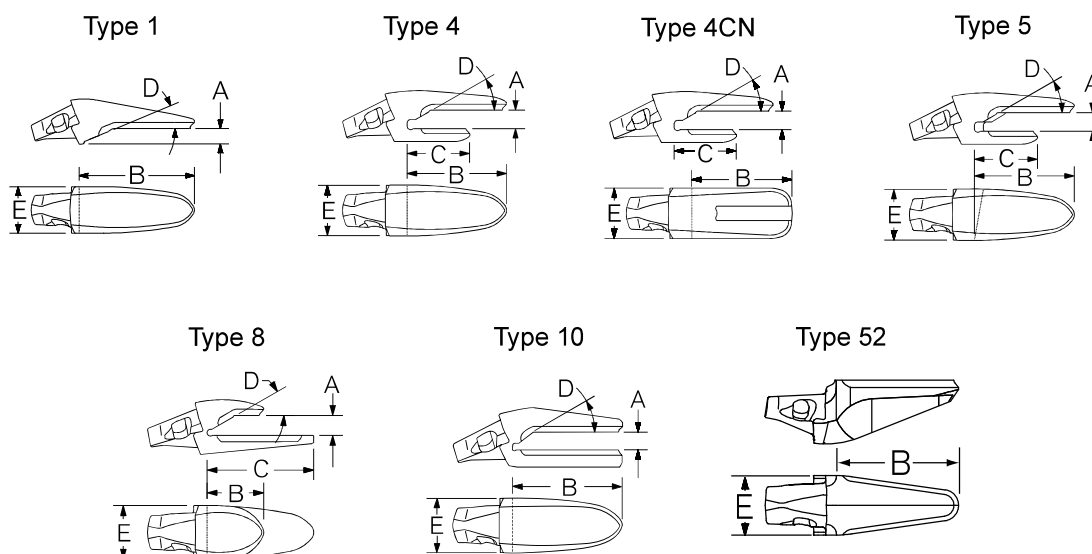

U55 Adapters

PART ID	TYPE	DESCRIPTION	A LIP THICKNESS mm / in	B TOP LEG mm / in	C BOTTOM LEG mm / in	D RAMP ANGLE deg	E ADAPTER WIDTH mm / in	NOSE ANGLE deg	WEIGHT kg / lb	MACHINE TYPE
Excavator										
8801A-U55	8	1-1/2 Bottom Leg	50 / 2.00	164 / 6.45	302 / 11.88	30	163 / 6.44	10	28.6 / 63.1	EXC
3811A-U55	8	1-1/2 Bottom Leg	60 / 2.38	164 / 6.45	302 / 11.88	30	163 / 6.44	10	32.5 / 71.6	EXC
5857A-U55	8	1-1/2 Bottom Leg	65 / 2.50	164 / 6.45	302 / 11.88	30	163 / 6.44	10	32.3 / 71.3	EXC
3858A-U55	8	1-1/2 Bottom Leg	70 / 2.75	164 / 6.45	302 / 11.88	30	163 / 6.44	10	31.8 / 70.1	EXC
8878-U55	4	1-1/2 Top Leg	65 / 2.50	321 / 12.64	196 / 7.71	30	163 / 6.44	10	38.7 / 85.3	EXC
3858B-U55	4	1-1/2 Top Leg	70 / 2.75	321 / 12.64	196 / 7.71	30	163 / 6.44	10	37.6 / 83.0	EXC
Wheel Loader										
8813A-U55	4	1-1/2 Top Leg	65 / 2.50	321 / 12.63	196 / 7.70	22.5-25	163 / 6.44	15	34.6 / 76.2	Loadmaster
8813LA-U55	5	1-1/2 Top Leg	65 / 2.50	321 / 12.65	196 / 7.71	22.5-25	163 / 6.44	15	33.2 / 73.1	Loadmaster
8813RA-U55	5	1-1/2 Top Leg	65 / 2.50	321 / 12.65	196 / 7.71	22.5-25	163 / 6.44	15	33.2 / 73.1	Loadmaster
5870A-U55 ❶	4CN	1-1/2 Top Leg Straddle	65 / 2.50	318 / 12.52	131 / 5.17	22.5-25	163 / 6.44	15	36.2 / 79.6	Loadmaster
1852-U55	1	Flushmount	60-65 / 2.38- 2.50	331 / 13.02	N/A	30	163 / 6.44	15	32.5 / 71.7	FEL (Straight or Spade)
4831A-U55	10	2 Leg	50 / 2.00	330 / 12.99	330 / 12.99	38	163 / 6.44	15	43.0 / 94.8	Hot Slag
Misc										
3858C-U55	8	1-1/2 Bottom Leg	70 / 2.75	310 / 12.20	500 / 19.70	90	163 / 6.44	10	46.2 / 101.8	Bucket Wheel
3898-U55	52	Flushmount	N/A	339 / 13.36	N/A	0	163 / 6.44	5	43.3 / 95.5	Clamshell

❶ Straddle leg to suit 50mm/2.00in. wing thickness