


ŘADA MF



UNIVERZÁLNÍ DRTIČ

- UNIVERSAL PROCESSOR
- FRANTUMATORE UNIVERSALE
- BROYEUR UNIVERSEL
- MULTIFUNCIÓN UNIVERSAL
- UNIVERSALGERÄT MULTI FUNKTION

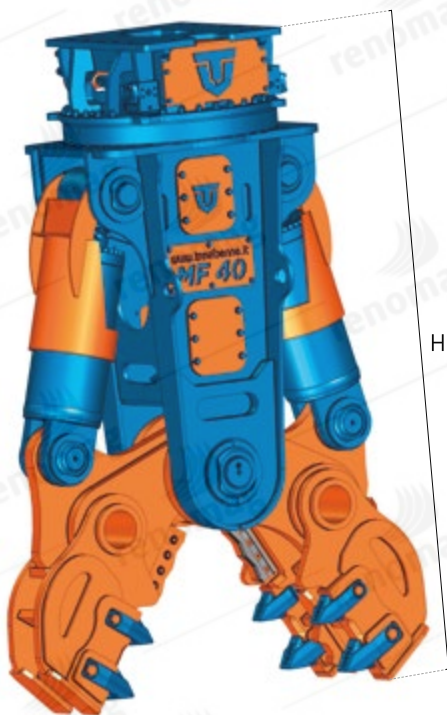

H

		MF 05	MF 15	MF 18	MF 25	MF 40	MF 60
	kg.	530	960	1380	1620	2620	3680
H	mm.	1500 ~	1800 ~	2000 ~	2300 ~	2600 ~	3000 ~
	max bar	320	350	350	350	350	350
	l/min.	80 / 250	150 / 250	200 / 300	250 / 350	300 / 400	400 / 600
	max bar	120	140	140	140	140	140
	max l/min.	10	10	10	10	10	10
		/	/	/	/	/	✓



(1) Optimální kombinace rýpadla a přídatného zařízení
Optimum excavator-equipment combination
Accoppiamento escavatore-attrezzatura ottimale
Couplage pelle-équipement optimal
Acoplamiento excavadora-implemento optimal
Optimale Bagger-Ausrüstung Kombination


(2) Možná kombinace rýpadla a přídatného zařízení
Possible excavator-equipment combination
Accoppiamento escavatore-attrezzatura possibile
Couplage pelle-équipement possible
Acoplamiento excavadora-implemento posible
Mögliche Bagger-Ausrüstung Kombination




HARDOX
WEAR PLATE



HARDOX
IN MY BODY

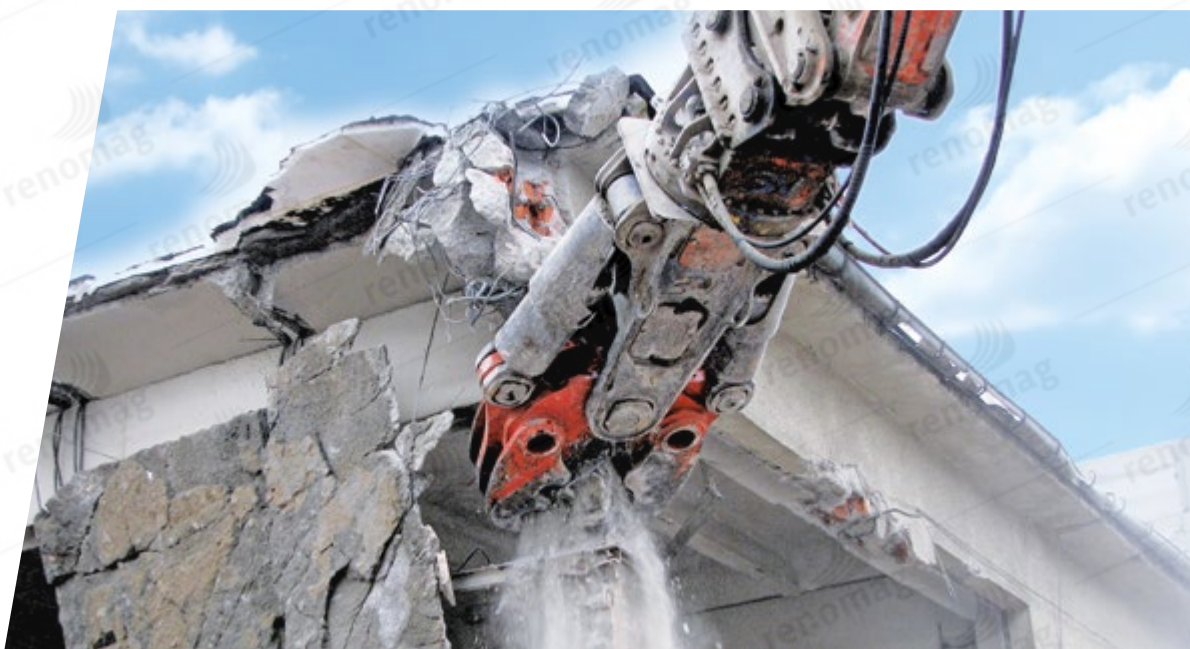

		KIT HC						KIT FR						
		MF 05	MF 15	MF 18	MF 25	MF 40	MF 60	MF 05	MF 15	MF 18	MF 25	MF 40	MF 60	
KIT HC		kg.	160	340	590	720	1420	1650	230	430	620	840	1510	1810
	A	mm.	570	690	780	940	1080	1350	570	630	710	870	980	1100
	B	mm.	435	525	580	690	770	880	435	490	570	660	710	820
	C	mm.	50	60	80	90	140	200	200	260	200	280	340	420
	D	mm.	50	60	80	90	140	200	330	400	320	440	520	600
KIT FR		mm.	140	180	220	220	260	260	140	180	220	220	260	260
	X	t.	120	136	149	193	385	583	120	136	149	193	385	583
	Y	t.	49	62	68	75	118	138	49	62	68	75	118	138
	Ø max	mm.	25	25	30	40	50	60	20	25	30	40	50	60
	 IPN max	mm.	/	/	/	/	/	/	/	/	/	/	/	/
	 HEA max	mm.	/	/	/	/	/	/	/	/	/	/	/	/
	 max	mm.	/	/	/	/	/	/	/	/	/	/	/	/
														

		KIT CS						KIT CB					
		MF 05	MF 15	MF 18	MF 25	MF 40	MF 60	MF 05	MF 15	MF 18	MF 25	MF 40	MF 60
KIT CS	 kg.	185	390	480	680	1080	1490	205	415	550	750	1340	1690
	A mm.	225	360	475	570	630	740	560	620	760	865	950	1230
	B mm.	210	270	360	460	750	860	380	430	570	675	750	920
	C mm.	50	80	90	90	90	100	50	60	70	90	100	120
	D mm.	155	240	265	280	330	350	160	210	235	250	330	370
	 mm.	120	150	200	260	390	440	180	260	350	400	450	540
KIT CB	X t.	85	106	136	136	348	539	85	106	143	174	373	655
	Y t.	35	62	80	87	112	127	29	49	68	75	112	132
	Ø max mm.	25	30	40	60	70	90	25	30	35	50	60	70
	 IPN max mm.	120	165	220	360	400	500	/	/	/	/	/	/
	 HEA max mm.	/	75	100	200	260	320	/	/	/	/	/	/
	 max mm.	/	/	/	/	/	/	/	/	/	/	/	/

		KIT CL						KIT MV						
			MF 05	MF 15	MF 18	MF 25	MF 40	MF 60	MF 05	MF 15	MF 18	MF 25	MF 40	MF 60
KIT CL		 kg.	295	545	710	805	1290	1860	330	680	1060	1260	1530	2310
		A mm.	80	120	150	150	200	250	820	1160	1350	2020	2160	2430
		B mm.	185	255	340	390	480	550	710	1170	1270	1000	1350	1510
		C mm.	50	70	80	80	90	110	260	370	400	540	660	810
		D mm.	205	270	300	300	350	350	420	600	650	820	990	1210
KIT MV		 mm.	160	225	300	350	400	450	/	/	/	/	/	/
		X t.	85	106	143	162	348	528	/	/	/	/	/	/
		Y t.	35	80	106	124	167	165	14	25	31	44	62	66
		Ø max mm.	/	/	/	/	/	/	/	/	/	/	/	/
		 IPN max mm.	/	/	/	/	/	/	/	/	/	/	/	/
		 HEA max mm.	/	/	/	/	/	/	/	/	/	/	/	/
		 max mm.	5	8	10	12	14	20	/	/	/	/	/	/